

T7BB & T7BBS 雙聯泵型號說明

Model No.

T7BB or T7BBS - B10 - B10 - 1 R 00 - A 1 M1 - ..

T7BB series - 100 A2 HW
ISO 2 bolts 3019-2 mounting flange

T7BBS series - SAE B 2 bolts
Mounting flange J744

Displacement P1 and P2

Volumetric displacement (ml/rev)

B02 = 5,8 B09 = 28,0
B03 = 9,8 B10 = 31,8
B04 = 12,8 B11 = 35,0
B05 = 15,9 B12 = 41,0
B06 = 19,8 B14 = 45,0
B07 = 22,5 B15 = 50,0
B08 = 24,9

Type of shaft T7BB - T7BBS

5 = keyed (ISO R775)

Type of shaft T7BBS

1 = keyed (non SAE)
2 = keyed (SAE BB)
3 = splined (SAE B)
4 = splined (SAE BB)

Modifications

Mounting w/connection variables

4 bolts SAE flange (J518)

	Metric thread T7BB - T7BBS		UNC thread T7BBS	
	M0	M1	00	01
P1	1"	3/4"	1"	3/4"
P2	3/4"			
S	2"1/2			

Seal class

1 = S1 - BUNA N
4 = S4 - EPDM
5 = S5 - VITON

Design letter


Porting combination (see page 62)

00 = standard

Direction of rotation (view on shaft end)


R = Clockwise
L = Counter-clockwise

INTERNAL LEAKAGE (TYPICAL)

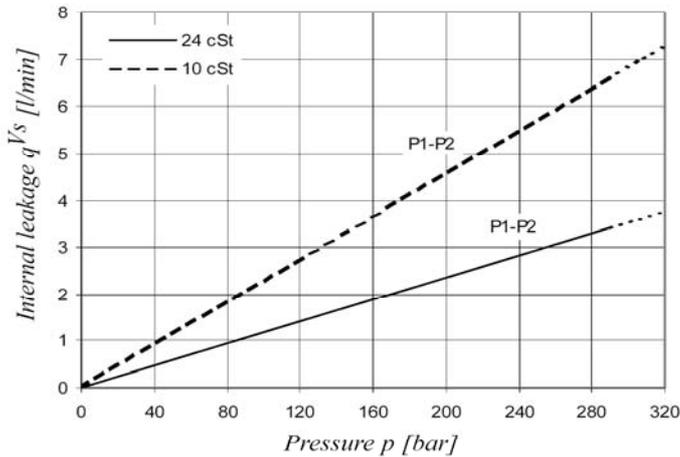


Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is higher than 50% of theoretical flow. Total leakage is the sum of each section loss at its operating conditions.

NOISE LEVEL (TYPICAL) T7BB - B10 - B04

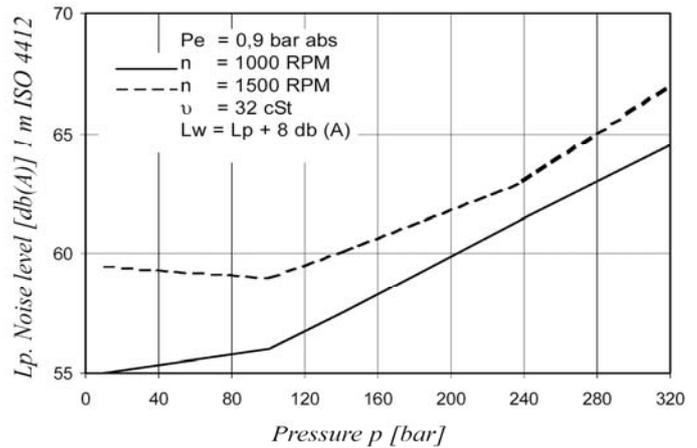


Double pump noise level is given with each section discharging at the pressure noted on the curve.

HYDROMECHANICAL POWER LOSS (TYPICAL)


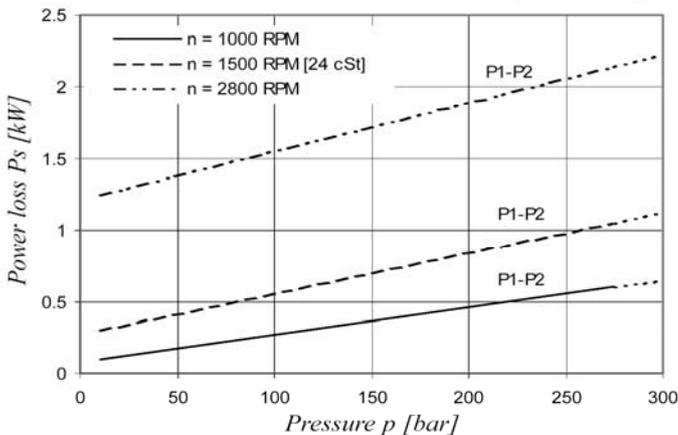


Total hydromechanical power loss is the sum of each section at its operating conditions.

PERMISSIBLE RADIAL LOAD

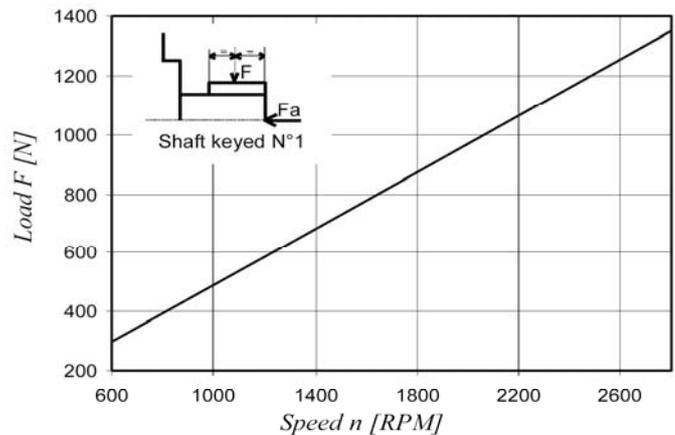

Maximum permissible axial load $F_a = 800\text{ N}$

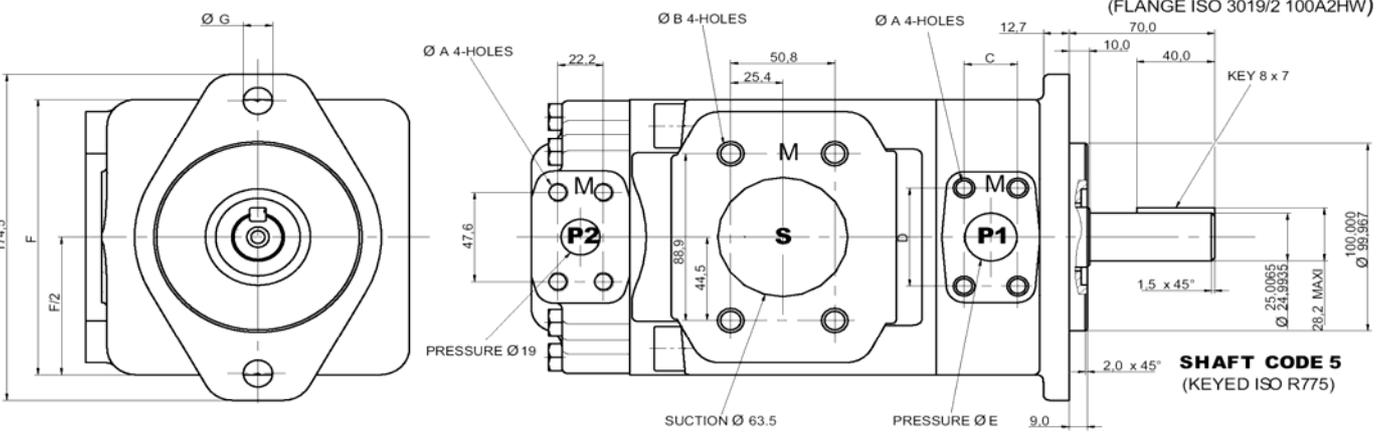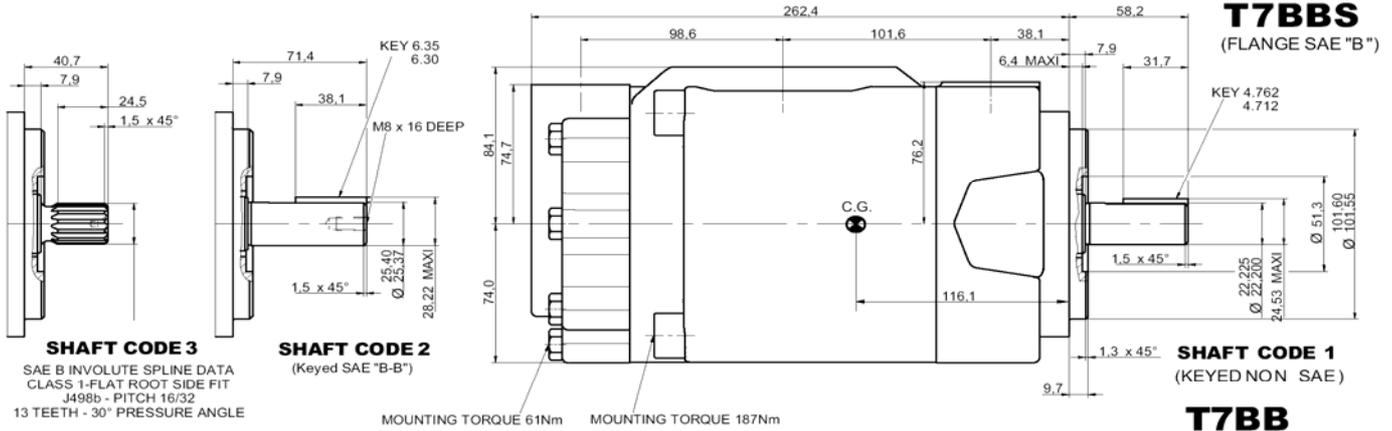

Shaft torque limits [ml/rev. x bar]	
Shaft	Vi x p max.
1	14300
2	21420
3	20600
4	32670
5	25300

	T7BBS		T7BB	
	00	01	M0	M1
Ø A	3/8" 16 UNC - 19 deep		M10 x 19 deep	
Ø B	1/2" 13 UNC - 22,4 deep		M12 x 22,4 deep	
C	26,20	22,25	26,20	22,25
D	52,4	47,65	52,4	47,65
Ø E	25,4	19,1	25,4	19,1
F	146		140	
G	73		70	
Ø H	14,3		14,0	